


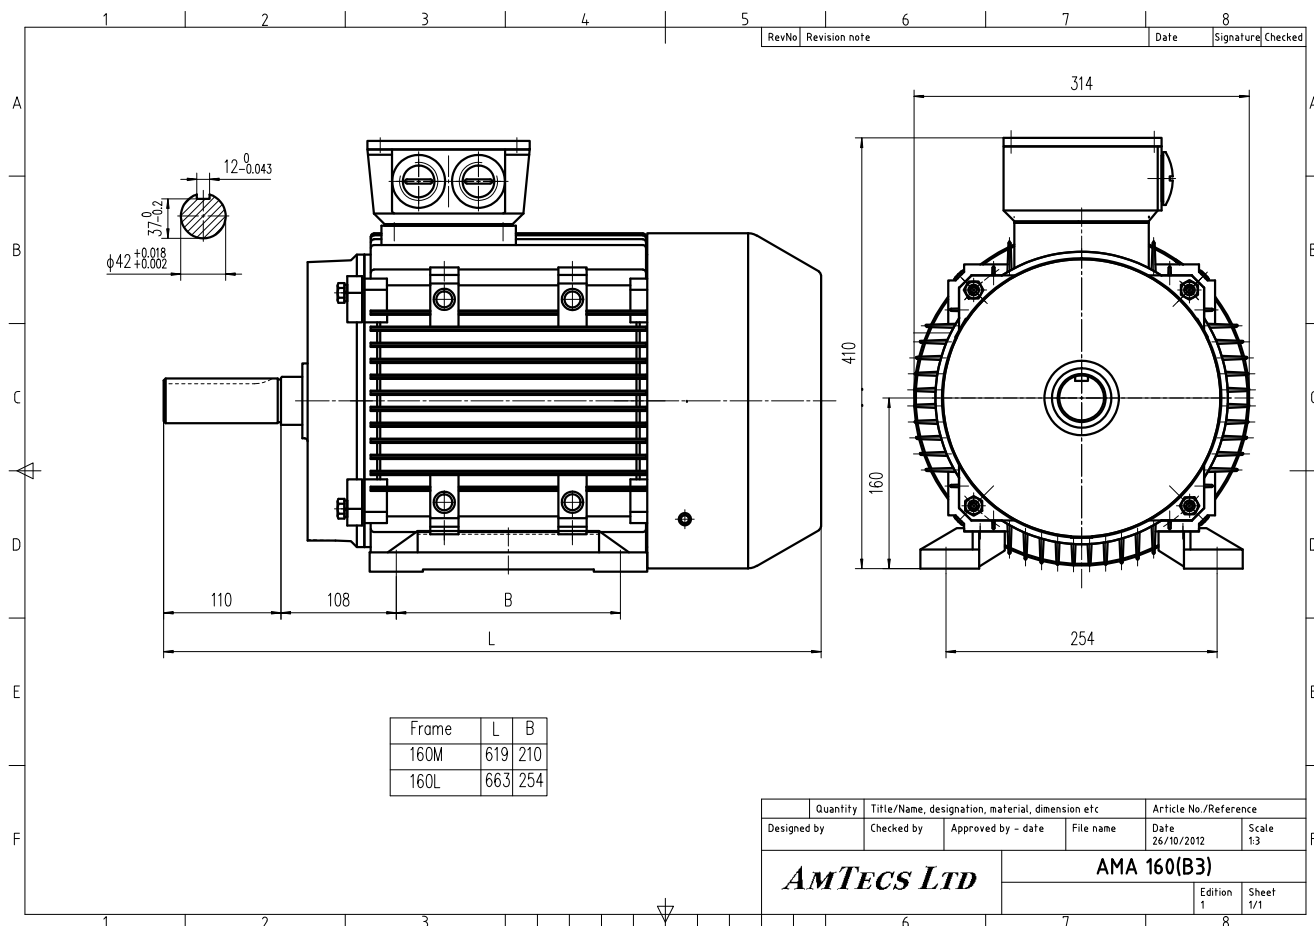

Specification **IEC 60034-1**
 Manufacturer **AmTecs**
 Motor type **AMA-IE2 160 L2**
 Rated power **18.5 kW S1 Duty**
 Speed **2937 rpm**
 Voltage **400V / 690V**
 Frequency **50 Hz**
 Connection **Delta / Star**
 Full load current **33 A / 19.05 A**
 No-load current
 Enclosure **IP55**
 Insulation class **F (temp. rise B)**
 Max. ambient temp **40 °C**
 Max. altitude **1000 mtr above sea level**
 Comment
 Cable entry **M32 x 1.5**
 Construction **Aluminium**
 Weight **115 Kg**
 Type number
 Warranty

Efficiency class **IE2**
 Load data **100%**
 Efficiency **90.9 %**
 Power factor **0.89**
 Sound pressure level (1m) **71 dB(A)**
 Resistance R20 (open)
 Resistance R20 (Delta)

Full load torque **60.15Nm**
 Starting / Full load torque **2.3**
 Pull up / Full load torque
 Pull out / Full load torque **3.1**

Starting / Full load current (DOL) **7.4**
 Starting / Full load current (Y/D)
 Rotor Inertia
 Bearing DE **6209**
 Bearing NDE **6209**

Electric Motors And Gearboxes Ltd
 103 Morgan Close
 Willenhall
 West Midlands
 WV12 4LH
 01902 601403
 sales@emag-ltd.co.uk

EMAG
 ELECTRIC MOTORS AND GEARBOXES LTD

www.emag-ltd.co.uk