




IMB3

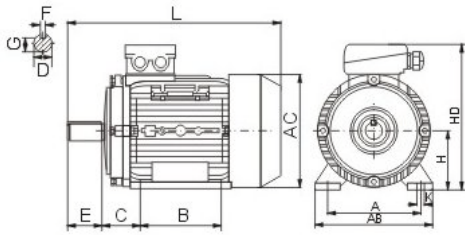

IMB35



IMB5

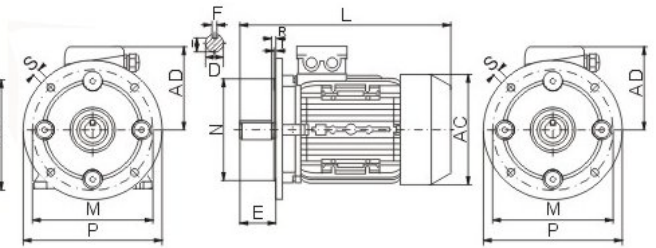

Frame Size	Mounting dimensions (mm)																			
	A	B	C	D	E	F	G	H	K	M	N	P	R	S	T	AB	AC	AD	HD	L
63	100	80	40	11	23	4	8.5	63	7	115	95	140	0	10	3	135	130	70	180	230
71	112	90	45	14	30	5	11	71	7	130	110	160	0	10	3	150	145	80	195	255
80	125	100	50	19	40	6	15.5	80	10	165	130	200	0	12	3.5	165	175	145	220	295
90S	140	100	56	24	50	8	20	90	10	165	130	200	0	12	3.5	180	195	155	250	320
90L	140	125	56	24	50	8	20	90	10	165	130	200	0	12	3.5	180	195	155	250	345
100L	160	140	63	28	60	8	24	100	12	215	180	250	0	15	4	205	215	180	270	385
112M	190	140	70	28	60	8	24	112	12	215	180	250	0	15	4	230	240	190	300	400
132S	216	140	89	38	80	10	33	132	12	265	230	300	0	15	4	270	275	210	345	470
132M	216	178	89	38	80	10	33	132	12	265	230	300	0	15	4	270	275	210	345	510
160M	254	210	108	42	110	12	37	160	15	300	250	350	0	19	5	320	330	255	420	615
160L	254	254	108	42	110	12	37	160	15	300	250	350	0	19	5	320	330	255	420	670
180M	279	241	121	48	110	14	42.5	180	15	300	250	350	0	19	5	355	380	280	455	700
180L	279	279	121	48	110	14	42.5	180	15	300	250	350	0	19	5	355	380	280	455	740
200L	318	305	133	55	110	16	49	200	19	350	300	400	0	19	5	395	420	305	505	770
225S4-10	356	286	149	60	140	18	53	225	19	400	350	450	0	19	5	435	470	335	560	820
225M2	356	311	149	55	110	16	49	225	19	400	350	450	0	19	5	435	470	335	560	815
225M4-10	356	311	149	60	140	18	53	225	19	400	350	450	0	19	5	435	470	335	560	845
250M2	406	349	168	60	140	18	53	250	24	500	450	550	0	19	5	490	510	370	615	910
250M4-10	406	349	168	65	140	18	58	250	24	500	450	550	0	19	5	490	510	370	615	910
280S2	457	368	190	65	140	18	58	280	24	500	450	550	0	19	5	550	580	410	680	985
280S4-10	457	368	190	75	140	20	67.5	280	24	500	450	550	0	19	5	550	580	410	680	985
280M2	457	419	190	65	140	18	58	280	24	500	450	550	0	19	5	550	580	410	680	1035
280M4-10	457	419	190	75	140	20	67.5	280	24	500	450	550	0	19	5	550	580	410	680	1035
315S2	508	406	216	65	140	18	58	315	28	600	550	660	0	24	6	635	645	630	845	1185
315S4-10	508	406	216	80	170	22	71	315	28	600	550	660	0	24	6	635	645	630	845	1215
315M2	508	457	216	65	140	18	58	315	28	600	550	660	0	24	6	635	645	630	845	1295
315M4-10	508	457	216	80	170	22	71	315	28	600	550	660	0	24	6	635	645	630	845	1325
315L2	508	508	216	65	140	18	58	315	28	60	550	660	0	24	6	635	645	630	845	1295
315L4-10	508	508	216	80	170	22	71	315	28	600	550	660	0	24	6	635	645	630	845	1325
355M2	610	560	254	75	140	20	67.5	355	28	740	680	800	0	24	6	730	710	655	1010	1500
355M4-10	610	560	254	95	170	25	86	355	28	740	680	800	0	24	6	730	710	655	1010	1530
355L2	610	630	254	75	140	20	67.5	355	28	740	680	800	0	24	6	730	710	655	1010	1500
355L4-10	610	630	254	95	170	25	86	355	28	740	680	800	0	24	6	730	710	655	1010	1530

EN60034-1 (IEC-DIN)